




(48 x 48)


Ordering Information

XT5042

Terminal Connections



Dimensions (in mm)

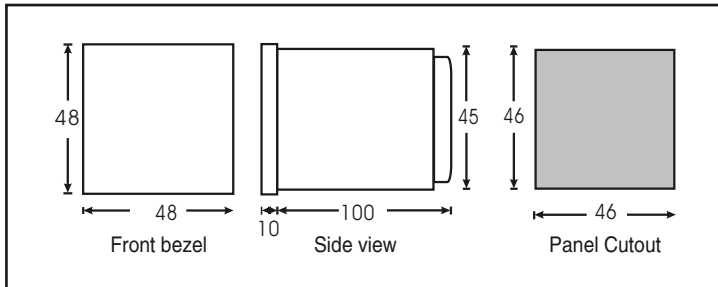

Technical Specifications

Display	Upper: 7 segment red LED; 0.5" Lower: 7 segment green LED ; 0.3"
Digits	Upper: 4 digits Lower: 4 digits
Time Setting	Front keypad
Operating Modes	ON delay / Interval delay / Cyclic ON first / Cyclic OFF first / Forward-pause-reverse/ instantaneous + delayed / timer / batch
Setpoints	2
Range	99.99 / 999.9 / 9999 sec, 99:59 min:sec, 999.9 / 9999 min, 99:59 hr:min, 999.9 / 9999 hr
Counting Direction	Up / down
Start Input	Gate / pulse start (programmable)
Accuracy	±0.05% of F.S. or 50 ms
Reset	Front, Remote, Power interruption (programmable)
Memory	10 years
Configuration Lock	Password protected
LED Indications	Relay status, sec, min & hr
Output	2, each 1NO
Relay Rating	5 A @ 230 VAC
Supply Voltage	85 to 270 VAC/DC, 24 VDC (optional)
Temperature	Operating: 0 to 50°C Storage: -5 to 50°C
Humidity (non-condensing)	95% RH
Weight	175 gms
Certifications	CE